INSTALLATION INSTRUCTIONS

Replacement HSI Control for CMF-PG Furnaces P/N 902922

INSTALLATION SEQUENCE

- 1. Disconnect electrical power.
- 2. Remove the Honeywell Hot Surface Ignition Control from the top of the control box located on the burner assembly (See Figure 1).
- 3. Remove the Time Delay Relay and the Motor Relay inside control box located on burner assembly (See Figure 1).
- 4. Install the new control onto the control box cover and wire (See Figure 2).

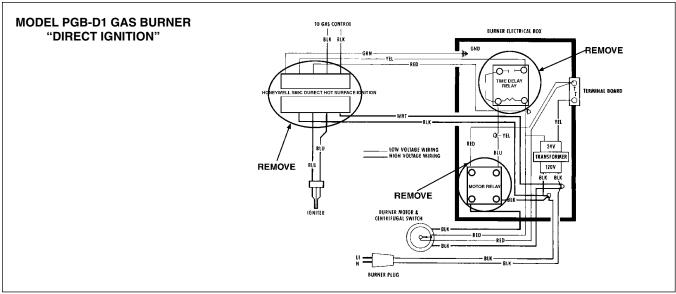


Figure 1. Old Assembly

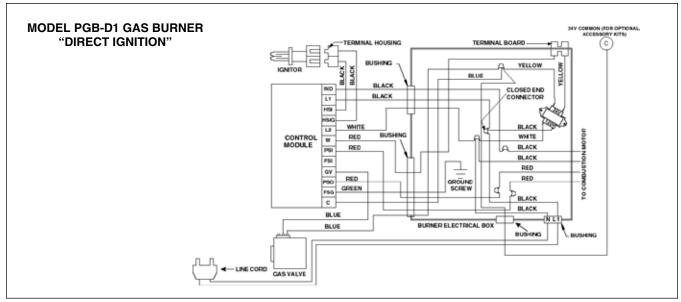


Figure 2. New Assembly

