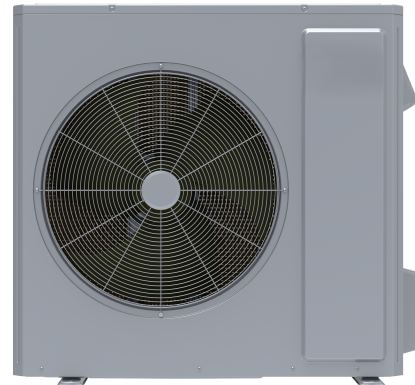


Submittal: UXH24-36MSK3IH**2/3 Ton Inverter Split System Heat Pump ODU****Inverter Split System Features and Benefits:**

- High efficiency heat pump system; up to 18 SEER and 10.0 HSPF
- Unparalleled heating performance; rated to -22°F with 100% nominal capacity to as low as -5°F
- 100% cooling capacity up to 109°F
- Fully-inverter-driven compressor is controlled in 1hz steps, outperforming few-speed compressors
- Side discharge outdoor Unit provides greater installation flexibility, requiring less space
- Capable of a braze-free installation, eliminating corrosive contaminants
- One system with two capacities set via the flip of a dip switch
- Long life PVE oil that does not break down in the presence of moisture
- One of the quietest outdoor units on the market
- Outdoor unit is sea coast rated showing no unexpected corrosion in 1500 hr salt spray test
- Control board indicates errors on easy-to-read display; no counting flashes
- Compatible with most 24V heat pump thermostats; non-communicating and R2485 communication
- Multi-level self protection ensures a long, trouble-free equipment life
- Intelligent defrost ensures defrost operation only operates when needed
- Built-in base pan heater provides protection from freezing and ice build-up
- Built-in crankcase heater protects the compressor
- Fits standard mini-split-style outdoor unit wall brackets
- 10 Year, non-transferable, parts and compressor warranty; no registration requirement
- No line connector required and can easily route the piping through the side or back
- Vapor-Liquid separator protects the compressor
- Utilizes a plate heat exchanger to control the refrigerant to the circuit as needed, increasing the sub cooling of the condenser, thus eliminating the need for a flash tank
- Pre-charged for 24.6 feet of line set. No refrigerant adjustment needed for less than 24.6'
- Copper-tube/aluminum fin outdoor and indoor coil
- Independent lab-tested and verified heating operation to -22°F (78% of nominal capacity) -
- Independent lab-tested and verified cooling operation to 129°F (78% of nominal capacity)



Submittal: UXH24-36MSK3IH**2/3 Ton Inverter Split System Heat Pump ODU**

Job Name:

Location:

Date:

Purchaser:

Engineer:

Submitted To:

For:

Unit Designation:

Schedule #:

SYSTEM RATINGS**Rated Capacities**

	2 Ton	3 Ton
Rated Cooling Capacity:	24,000	34,000
Rated Heating Capacity:	25,000	34,000

Efficiencies

SEER:	18	18
HSPF:	10	10
EER (95°):	12.5	12

Power Supply

Voltage (Min-Max):	187 - 253	187 - 253
MCA:	27.7	27.7
MOCP:	30	30

Ambient Operating Ranges

Cooling: 5~129° F

Heating: -22~75° F

Max. Sound Pressure dB(A): 61 dB

OUTDOOR UNIT DATA**Compressor**

Type: Inverter Rotary

RLA (A): 19.7

Model: QXFT-F310zN450

Oil: Polyvinylether (PVE)

Fan Motor

Type: Brushless DC

FLA: 3

Model: B-SWZ150E

Physical Characteristics

Net Weight (lbs): 187.4

Gross Weight (lbs): 211.6

Height: 37"

Width: 1.5"

Length: 30.1"

Refrigerant Piping Data

Refrigerant Type: R-32

Pre-charged Amount (lbs): 102.3

Pre-Charged Length (ft): 24.6

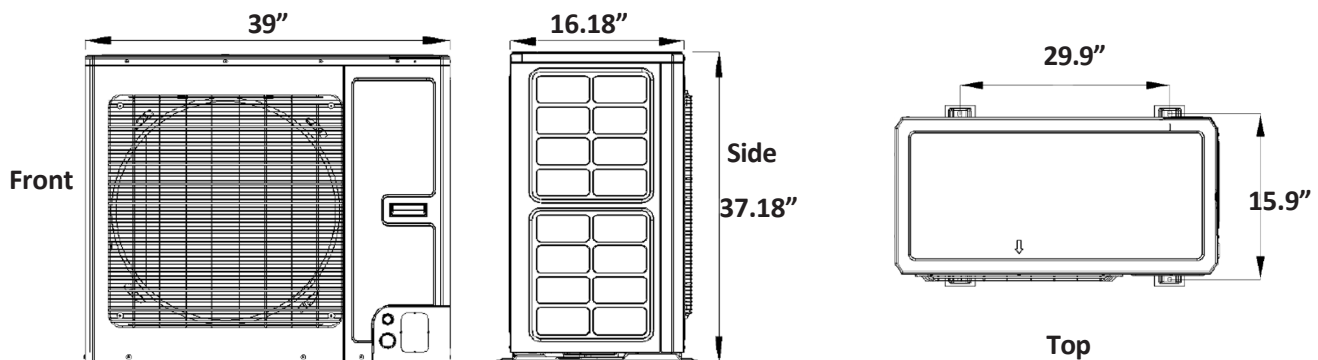
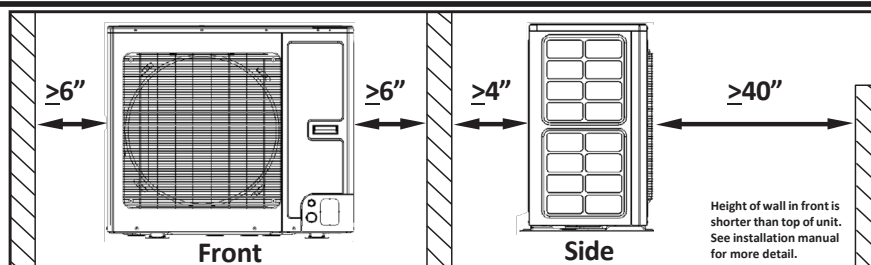
Additional amount (Oz/ft.): 0.32

Max. Piping Length (ft): 98.4

Max. Piping Height (ft): 49.2

ODU Connection Size (Liquid): 3/8"

ODU Connection Size (Gas): 3/4"

Outdoor Unit Dimensions**Typical Installation Minimum Clearances**

Covered Installation Examples

