

## Interior Roof Jack Extension Kits

# Installation Instructions

**NOTE:** Installation is to be made in accordance with H.U.D. Manufactured Home Construction And Safety Standard (Title 24, Part 280). For Canada the following installation codes apply: CSA B139-1976; Installation code for oil burning equipment. CAN/CGA B149.1-M86 Natural Gas code. CAN/CGA B149.2-M86 Propane Gas code.

DESCRIPTION	SPEC. NO.	MODEL NO.
INTERIOR EXTENSION		
10" LENGTH, 4" FLUE DIA.	901934	EI 10A-4
10" LENGTH, 5" FLUE DIA.	901935	EI 10A-5
18" LENGTH, 5" FLUE DIA.	903107	EI 18A-5

## WARNING

Be sure appliance is turned off before installing extension kits.

### LOWER PIPE EXTENSION KIT

(Consists of 2 pipes (10" or 18") long and 2 #10 sheet metal screws)

#### Installation:

1. Remove sheet metal screw securing outer combustion air pipe and flue pipe to furnace. Lift pipes up and off furnace.

2. Insert inner flue pipe extension over furnace flue collar and attach with one of the supplied sheet metal screws. Small end with bead must be up for attachment to inner flue pipe. Attach outer combustion air pipe extension to top of furnace using 1 #10 sheet metal screw supplied. The smaller beaded end must be up for attachment to the Roof Jack outer combustion air pipe. Slide inner flue pipe assembly down onto both extension pipes until stopped against bead. Secure outer combustion air pipe using #10 sheet metal screw, to extension pipe. See Figure 2 Note: Extension joint (bead) of Interior Roof Jack Extension must be below ceiling.

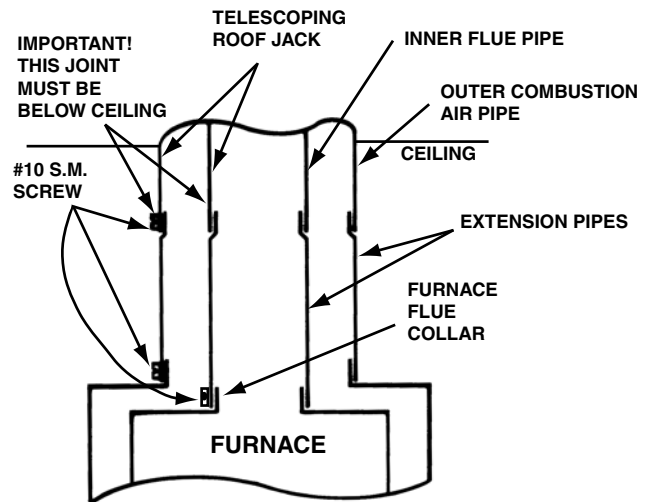


Figure 1.

These instructions are primarily intended to assist qualified individuals experienced in the proper installation of heating and/or air conditioning appliances. Some local codes require licensed installation/service personnel for this type equipment. Read all instructions carefully before starting the installation.

**NORDYNE**  
COMPLETE COMFORT. GENUINE VALUE.

Specifications & illustrations subject to change without notice or incurring obligations (01/14).



7076270 (Replaces 7065490)