

WIRING DIAGRAM


Q5RF/PPH2RF SERIES SMALL PACKAGE H/P 208/230 VOLT 2 TON AND 3 TON

60HZ/SINGLE PHASE

NOTES:

1. Disconnect all power before servicing.
2. For supply connections use copper conductors only.
3. Not suitable on systems that exceed 150V to ground.
4. For replacement wires use conductors suitable for 105°C.

5. Couper le courant avant de faire letretine.
6. Employez uniquement des conducteurs en cuiver.
7. Ne convient pas aux installations de plus de 150V a la terre.

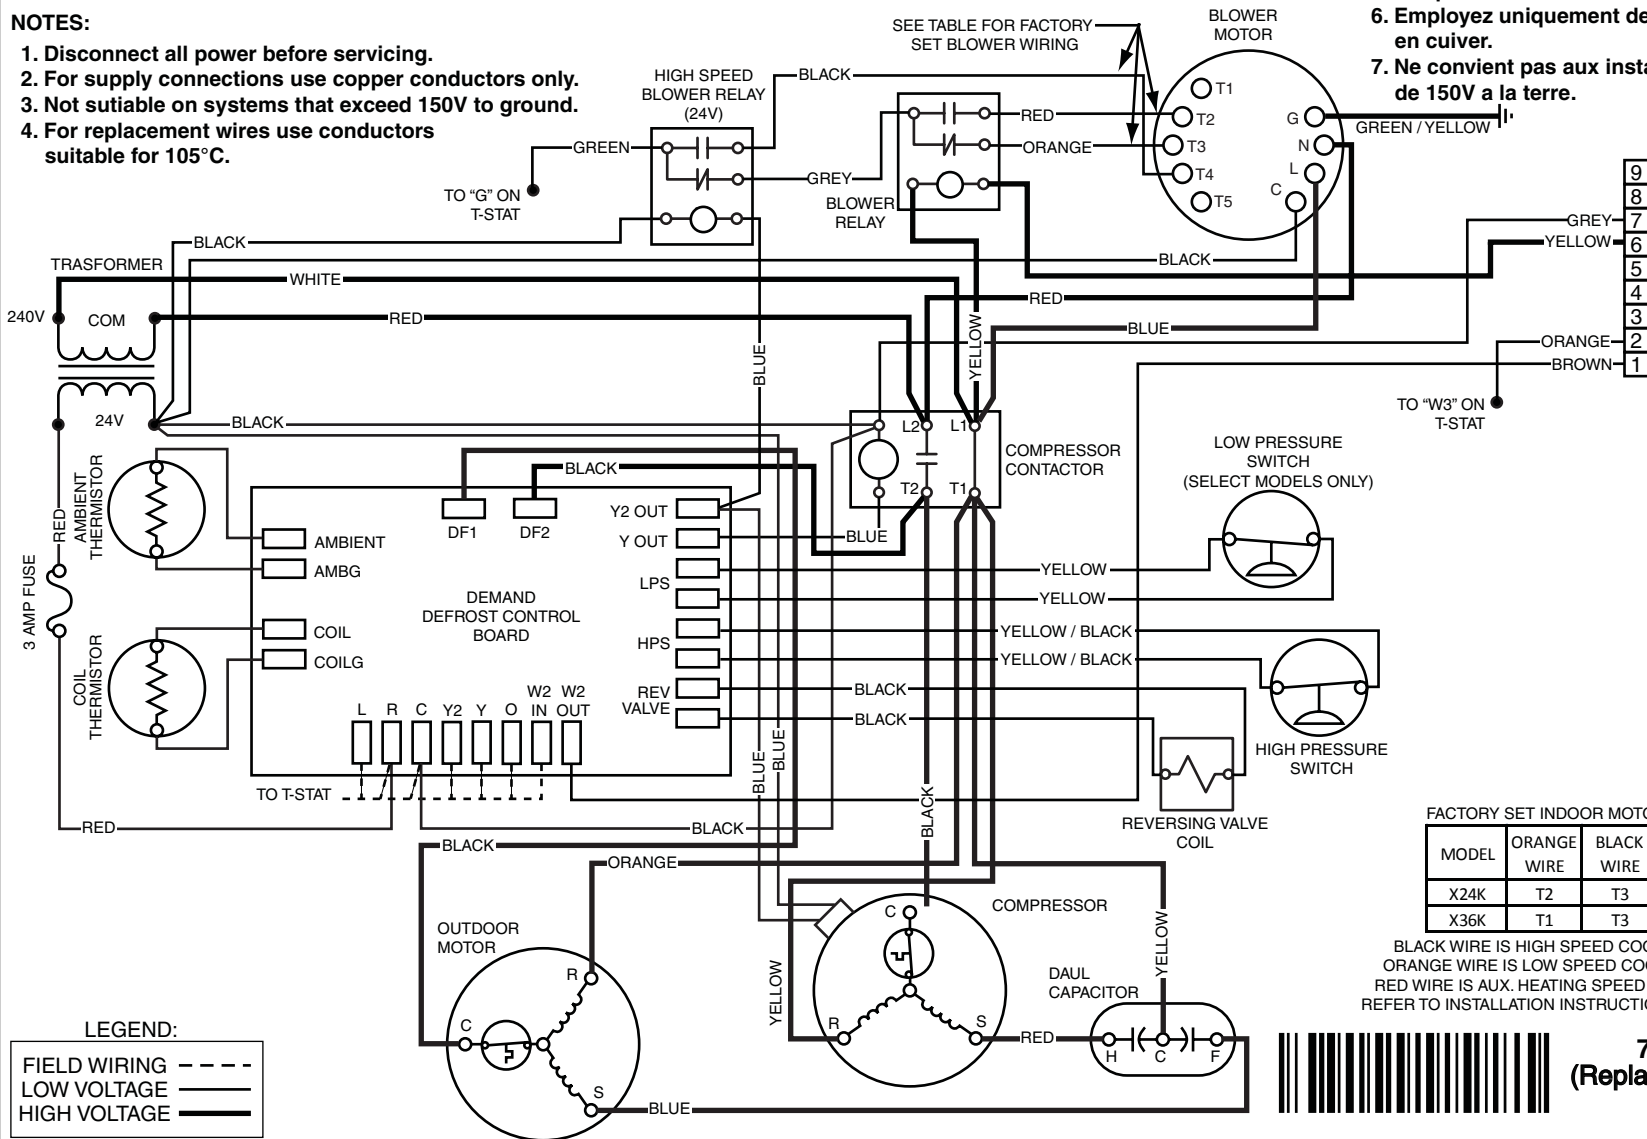

FACTORY SET INDOOR MOTOR WIRING

MODEL	ORANGE WIRE	BLACK WIRE	RED WIRE
X24K	T2	T3	T4
X36K	T1	T3	T4

BLACK WIRE IS HIGH SPEED COOLING/HEATING
 ORANGE WIRE IS LOW SPEED COOLING/HEATING
 RED WIRE IS AUX. HEATING SPEED (ELECTRIC HEAT)
 REFER TO INSTALLATION INSTRUCTIONS FOR CFM DATA



710880C
(Replaces 710880B)

0809