

TECHNICAL SPECIFICATIONS

NT4(B,Q)D-K/KA Series

High Efficiency Heat Pumps 13+ SEER System

1.5 - 5 Ton Capacity

The NT4(B,Q)D-K/KA Series now offers the choice of a heat pump that uses a more efficient and environmentally friendly refrigerant designated R-410A. The heat pump, when combined with our engineered matched indoor coils, offer a full line of quality, split-system heat pumps. Units are ideally sized for manufactured housing applications.




WARRANTY

- 1 year limited parts
- 5 year compressor
- 1 year mileage
- 1 year labor

FEATURES and BENEFITS

- **R-410A Refrigerant:** Earth friendly non- ozone depleting refrigerant.
- **Copper Tube / Aluminum Fin Coils:** Both indoor and outdoor coils are designed to optimize heat transfer, minimize size and cost, and increase durability and reliability.
- **Permanently Lubricated Motor:** A heavy duty PSC motor for long lasting reliability and quiet operation. Requires no maintenance and is completely protected from rain and snow.
- **Time/Temperature Defrost:** A reliable, industry standard control offers various time settings to meet any type climate.
- **Removable Top Grille Assembly:** Allows ease of service from the top without disconnecting fan motor leads.
- **Composite Base Pan –** Absorbs sound and corrosion resistant. Composite is also stronger and lighter than steel.
- **One Piece Top/Orifice:** Designed for maximum airflow and quiet operation.
- **Common Suction Service Port:** This port allows the contractor to read the suction pressure in all modes of operation without removing any panels, saving time and increasing serviceability.
- **Five Minute Restart Time Delay:** When the unit shuts down, a five minute delay keeps the unit from restarting, eliminating the highest cause for compressor failure.
- **Suction Accumulator:** Protection from liquid flood back and future compressor failures.
- **Hot Gas Muffler:** Reduces compressor noise and vibration.
- **Easy Compressor and Control Access:** Designed to make servicing easier for the contractor, access panels are provided to all controls and the compressor from the side of the unit.
- **Durable, Attractive Cabinet:** Designed using galvanized steel with a polyester urethane finish. The 950 hour salt spray finish is 1.5 mil thick and resists corrosion 50% better than comparable units.
- **High Pressure Switch:** Protects against abnormally high system pressures. Auto-reset feature prevents nuisance service calls.
- **Liquid Line Filter Drier:** Included with outdoor unit.
- **Composite Base Pan:** Absorbs sound and is corrosion resistant. Composite is also stronger and lighter than steel.


MODEL IDENTIFICATION CODES

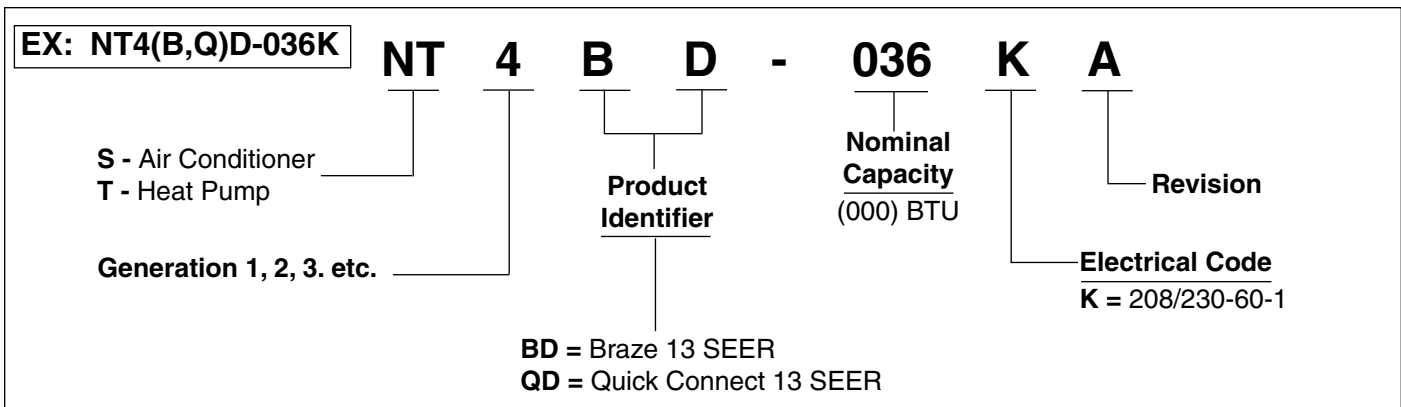

DIMENSIONS

HEAT PUMP OUTDOOR SECTION

NT4(B,Q)D	018K	024KA	030KA	036KA	042K	048K	060K
H	31 1/2	35 1/2	39 1/2	43 1/2	39 1/2	43 1/2	43 1/2
W	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4
D	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4	30-3/4

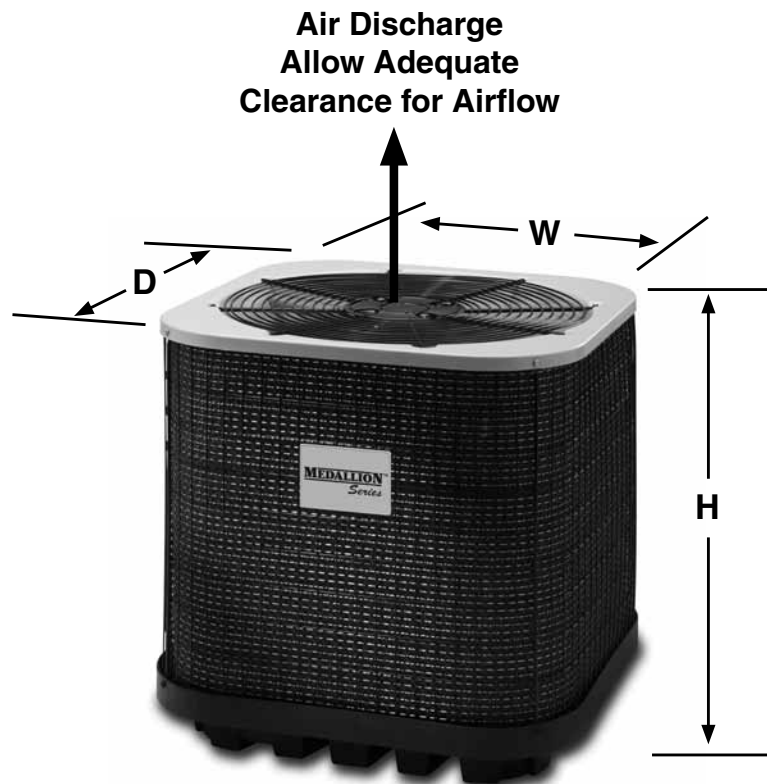

PHYSICAL AND ELECTRICAL SPECIFICATIONS / OUTDOOR UNITS

13 SEER — High Efficiency — Single Phase

Model Number NT4(B,Q)D-		018K	024KA	030KA	036KA	042K	048K	060K
Electrical Data	Volts-Cycles-Phase (1)	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1	208/230-60-1
	Total Amps	10.2	14.6	15.3	17.8	19.4	23.2	27.7
	Delay Fuse Max. (2)	20	30	30	35	40	50	60
	Min. Circuit Ampacity	12.4	18.0	18.8	22.0	23.9	28.7	34.3
Condenser Data	Coil	Area	17.7	20.3	22.8	25.3	22.8	25.3
		Rows-FPI	1-18	1-18	1-20	1-20	2-16	2-16
		Tube Dia	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.	3/8" O.D.
	Fan Motor	Type	PSC	PSC	PSC	PSC	PSC	PSC
		Amps	1.2	1.2	1.2	1.2	1.46	1.46
		HP	0.2	0.2	0.2	0.2	0.25	0.25
	Fan Blade	Dia - # Blades	24" - 2					
		SCFM	3000	3200	3300	3400	3700	3800
	Compressor Data	RLA	9.0	13.4	14.1	16.6	17.9	21.8
		LRA	48.0	58.3	73.0	79.0	112.0	134.0
Refrigerant suction line O.D. Note: Liquid line is 3/8" O.D. for entire length	0-24 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"
	25-39 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8" (3)
	40-75 ft.	3/4"	3/4"	3/4"	7/8"	7/8"	7/8"	1-1/8" (3)
Approximate Weight (lbs.)	Net	166	171	176	181	247	280	290
	Ship	175	180	185	190	260	295	305
Sound Rating db		73	73	73	73	79	79	79

(1) Operating Voltage Range: 187v min. - 253v max.

(2) HACR Type Circuit Breakers may be used.

(3) Requires 7/8" to 1-1/8" reducer from line to unit.

(4) Additional charge for line sets above 15 feet.

Values based on suction line as follows with 3/8" liquid line.

a) 3/4" = 0.6 oz. per additional foot.

b) 7/8" = 0.7 oz. per additional foot.

c) 1 1/8" = 0.8 oz. per additional foot.

ACCESSORIES - Condensing Unit

Start Assist Kit - 912933

Provides additional starting torque for the compressor motor when operating with low line voltage or high operating temperatures.

Outdoor Thermostat - 913852

Two-stage logic provides ability to lock out electric strips down to balance point and bring on in stages.

Fan Delay Kit (TDR)

918476 - 80-second fan delay.

Liquid Line Solenoid (LLS) Kit - 912650

SYSTEM HEATING & COOLING CAPACITIES

13 SEER — High Efficiency — Single Phase

M1, M7		Coleman/Vexar/Revolv Gas or Electric						
Outdoor Unit	Indoor Coil	Coil Height	Cooling Capacity	SEER	EER	HSPF	SCFM	47F Capacity
NT4QD-024KA	C8QAM024U-B	20"	22,800	13.0	11.0	8.0	855	25,200
NT4QD-030KA	C8QAM030U-B	20"	28,800	13.0	11.0	8.0	1005	31,800
NT4QD-036KA	C8QAM036U-B	20"	35,000	13.0	11.0	8.0	1180	39,000
NT4QD-042K	CM4Q-53U	18.5"	39,000	13.0	11.5	8.0	1310	40,500
NT4QD-048K	CM4Q-53U	18.5"	45,500	13.0	11.7	8.0	1400	46,500
NT4QD-060K*	CM4Q-54U**	18.5"	51,000	13.0	11.5	7.7	1400	51,000
NT4BD-018K	C8(B,D)AM01830U-B	20"	18,000	13.0	11.0	8.0	580	20,200
NT4BD-024K	C8(B,D)AM01830U-B	20"	22,800	13.0	11.0	8.0	855	25,200
NT4BD-030K	C8(B,D)AM01830U-B	20"	28,800	13.0	11.0	8.0	1005	31,800
NT4BD-036K	C8(B,D)AM036U-B	20"	35,000	13.0	11.0	8.0	1180	39,000
NT4BD-042K	CM4B-53U	18.5"	39,000	13.0	11.5	8.0	1310	40,500
NT4BD-048K	CM4B-53U	18.5"	45,500	13.0	11.7	8.0	1400	46,500
NT4BD-060K*	CM4B-54U**	18.5"	51,000	13.0	11.5	7.7	1400	51,000

* 5 ton condenser is not a valid match with the M7

** Requires 5 ton blower on High speed

E3								
Outdoor Unit	Indoor Coil	Coil Height	Cooling Capacity	SEER	EER	HSPF	SCFM	47F Capacity
NT4QD-024KA	C8QAM024U-B	20"	22,800	13.0	11.0	8.0	855	25,200
NT4QD-030KA	C8QAM030U-B	20"	28,800	13.0	11.0	8.0	1005	31,800
NT4QD-036KA	C8QAM036U-B	20"	35,000	13.0	11.0	8.0	1180	39,000
NT4QD-042K	CM4Q-53U	18.5"	39,000	13.0	11.5	8.0	1310	40,500
NT4QD-048K	CM4Q-53U	18.5"	45,500	13.0	11.7	8.0	1400	46,500
NT4QD-060K*	CM4Q-54U**	18.5"	51,000	13.0	11.5	7.6	1400	51,000
NT4QD-060K*	CM4Q-56U**	24.5"	53,000	13.0	11.7	8.0	1600	54,000
NT4BD-018K	C8(B,D)AM01830U-B	20"	18,000	13.0	11.0	8.0	580	20,200
NT4BD-024K	C8(B,D)AM01830U-B	20"	22,800	13.0	11.0	8.0	855	25,200
NT4BD-030K	C8(B,D)AM01830U-B	20"	28,800	13.0	11.0	8.0	1005	31,800
NT4BD-036K	C8(B,D)AM036U-B	20"	35,000	13.0	11.0	8.0	1180	39,000
NT4BD-042K	CM4B-53U	18.5"	39,000	13.0	11.5	8.0	1310	40,500
NT4BD-042K	CM4B-54U	18.5"	41,500	13.0	11.7	8.0	1400	41,500
NT4BD-048K	CM4B-53U	18.5"	45,500	13.0	11.7	8.0	1400	46,500
NT4BD-048K	CM4B-54U	18.5"	46,500	13.0	12.0	8.0	1400	46,500
NT4BD-060K	CM4B-54U**	18.5"	51,000	13.0	11.5	7.6	1400	51,000
NT4BD-060K	CM4B-56U**	24.5"	53,000	13.0	11.7	8.0	1600	54,000

** Requires 5 ton blower on High speed

See current AHRI Directory for certified combinations and ratings.

www.ahridirectory.org



GENERAL TERMS OF LIMITED WARRANTY

NORDYNE will furnish a replacement for any part of this product which fails in normal use and service within the first year of installation, in accordance with the terms of the warranty.

For complete details of the Limited Warranty, including applicable terms and conditions, see your local installer or contact the NORDYNE warranty department for a copy.

NORDYNE

COMPLETE COMFORT. GENUINE VALUE.

8000 Phoenix Parkway | O'Fallon, MO 63368-3827

Specifications and illustrations subject to change without notice and without incurring obligations. Printed in U.S.A (03/2012)

830D-0312 (Replaces 830D-0112)