

Gibson

Heating and Cooling Products

R410-A

Inverter

ETL
Intertek

AIR-QUALITY
CERTIFIED

3DC

10 YEAR
WARRANTY

Submittal: GDH24(7.0)FMK4DH

Flex Match Ducted Indoor Unit

Features:

- Inverter-driven Variable Speed Blower
- Flared Piping Connections
- Wireless Remote Controller Included
- Wired Remote Controller Included
- Built-in Condensate Lift Pump
- Air Filters Included
- Intelligent Pre-Heat
- Child Lock Function
- Configurable Return (Rear & Bottom)



Indoor Unit Data

Blower:

CFM (Max/Min):	588/323
Output (W):	22.5
FLA:	0.5
Capacitor Rating (µF):	3.0

Sound Pressure

Cooling dB (A) (Min/Max):	34/42
---------------------------	-------

Physical Characteristics

Net Weight (lbs): 68.355

Dimensions (in.)

W:	43.3
D:	24.2
H:	7.9

Piping Connection Size

"Liquid":	3/8"
Gas:	5/8"

Piping Note: A 3/8" to 1/2" adapter and a 1/4" to 3/8" adapter will be used at the outdoor unit. Line set will be 3/8" and 5/8".

Dimensions


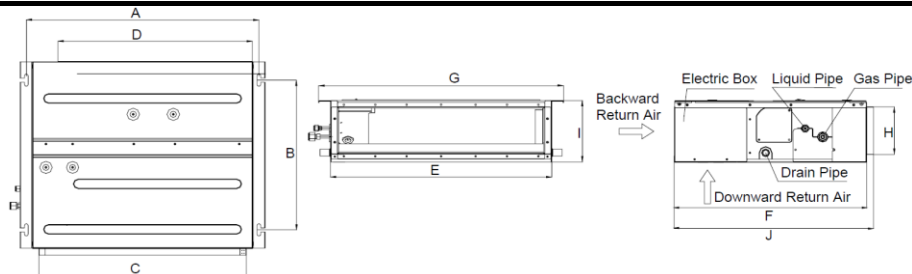


Table 1: Outline Dimensions: mm (in)

Item Model	A	B	C	D	E	F	G	H	I	J
GDH09(2.6)FMK4DH	742 (29-3/16)	491 (19-5/16)	662 (26-1/16)	620 (24-7/16)	700 (27-9/16)	615 (24-3/16)	782 (30-13/16)	156 (6-1/8)	200 (7-7/8)	635 (25)
GDH12(3.5)FMK4DH	942 (37-1/16)	491 (19-5/16)	862 (33-15/16)	820 (32-5/16)	900 (35-7/16)	615 (24-3/16)	982 (38-11/16)	156 (6-1/8)	200 (7-7/8)	635 (25)
GDH18(5.3)FMK4DH	1142 (44-15/16)	491 (19-5/16)	1062 (41-13/16)	1020 (40-3/16)	1100 (43-5/16)	615 (24-3/16)	1182 (46-9/16)	156 (6-1/8)	200 (7-7/8)	635 (25)

Clearances

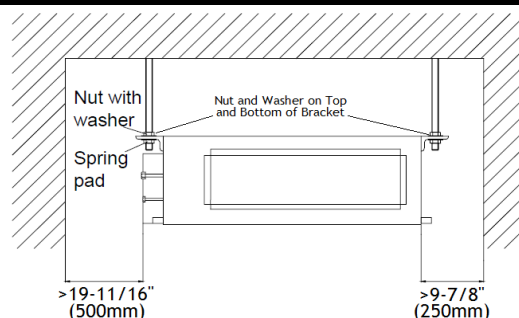

Specifications & illustrations are subject to change without notice or incurring obligations.
O'Fallon, MO ©Nortek Global HVAC, LLC 2017. All Rights Reserved. 909E (6/17)

IDU SKU: 1009432