



VF-ST

Appliance Specifications


Note: J box can be located in either the right front or left front corners of the appliance by relocating the moveable J box plate.

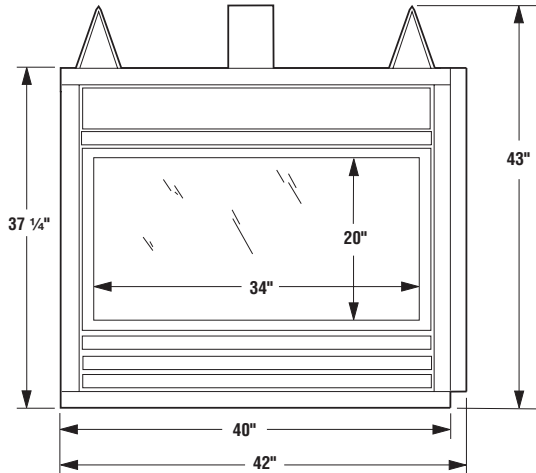


Front View

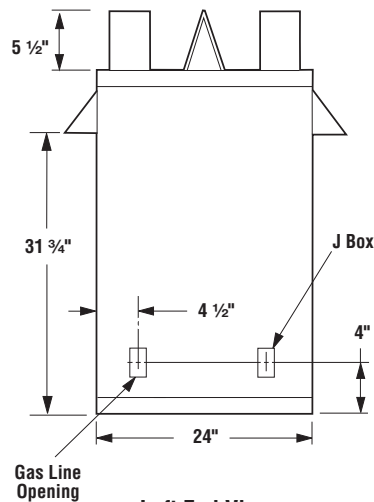

Left End View
(from control side)

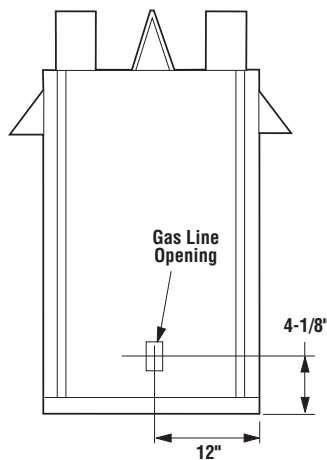


Right End View
(from control side)

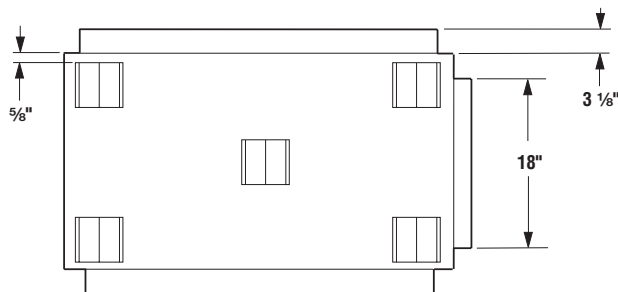

Top View


Framing Specifications

Note: Framing dimensions are calculated for a nailing flange depth of 1/2".

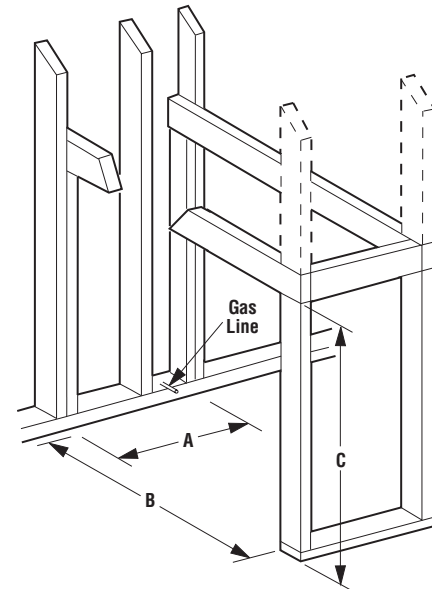

Framing Dimensions

A	22-3/4"
B	43" Min.
C	43-1/4" Min.

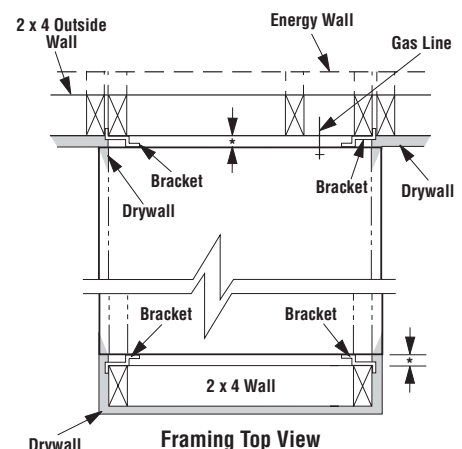

Framing Top View

* 1/2" Required Air Space Clearance


VF-ST

FIREPLACE FINISHES

Wall Details

Minimum clearance to combustibles are:

Appliance: side and back – 0"
 floor – 0"
 adjacent wall – 6"
 ceiling – 37-1/2"

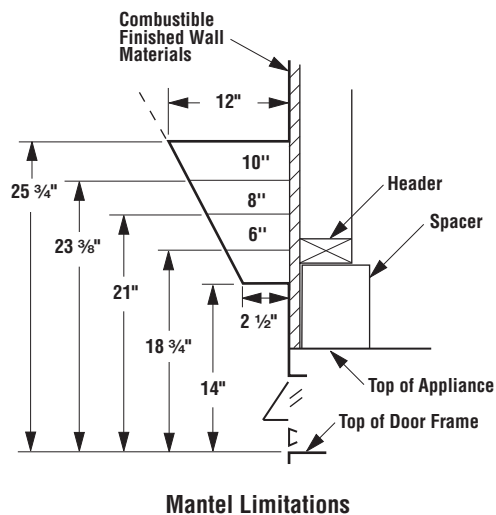


Minimum Clearance Combustibles

A hearth extension is not required with this appliance. If a hearth extension is used, it is merely for decorative purposes and does not have to meet standard hearth requirements. Do not block the lower louvered area.

A combustible mantel shelf projecting a maximum of 8" from the wall may be installed at minimum distance of 13" above the fireplace opening.

Note: Combustible wall finish materials and/or surround materials must not be allowed to encroach the area defined by the appliance front face (black sheet metal). Never allow combustible materials to be positioned in front of or overlapping the appliance front face.

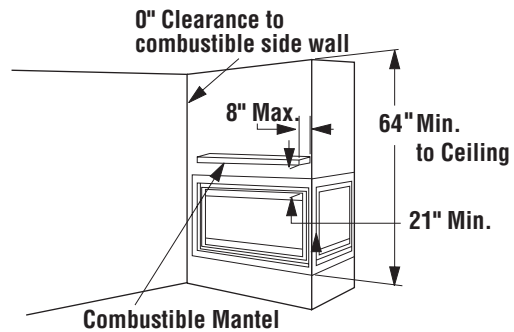


Minimum Clearance Framing


VF-PF

Appliance Specifications

Note: J box can be located in either the right rear or left rear corners of the appliance by relocating the moveable J box plate.

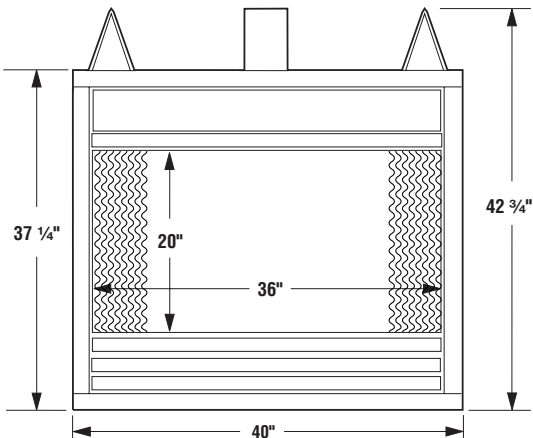


Front View

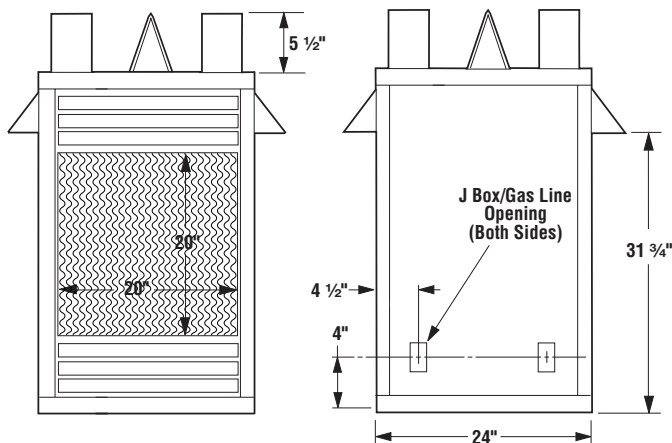

Open End


End View

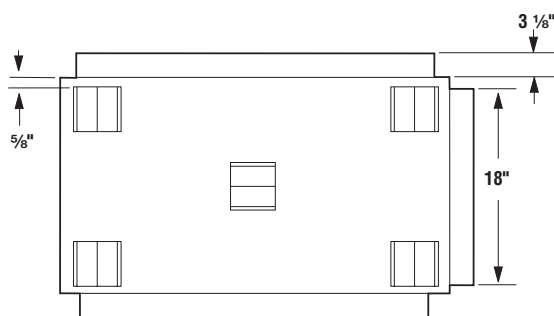

Top View

Framing Specifications


Note: Framing dimensions are calculated for a nailing flange depth of 1/2 inch.

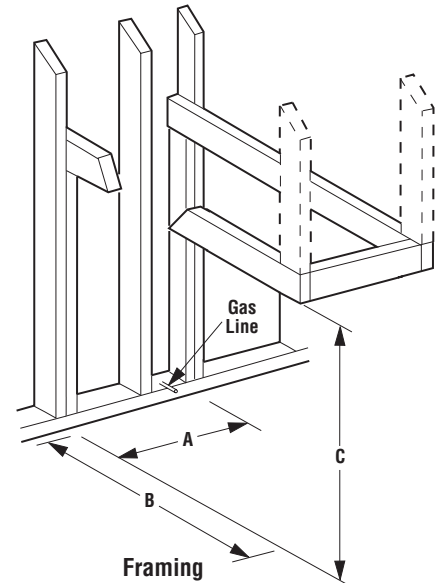

Framing Dimensions

A	22-3/4"*
B	40-1/8" Min.
C	43" Min.

* Note: Framing dimensions calculated for 5/8 inch drywall finish

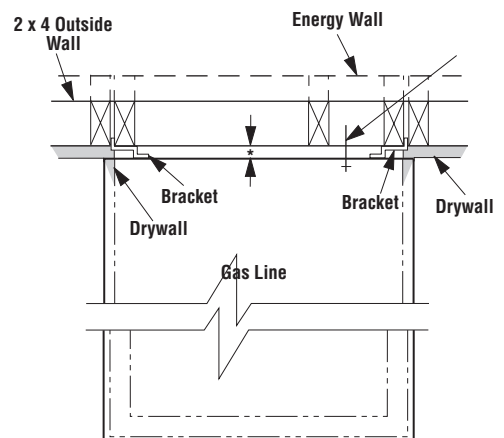

Framing Top View

* 1/2 inch Required Air Space Clearance




VF-PF

FIREPLACE FINISHES

Wall Details

Minimum clearance to combustibles are:

Appliance: side and back – 0"
 floor – 0"
 adjacent wall – 0"
 ceiling – 37-1/2"

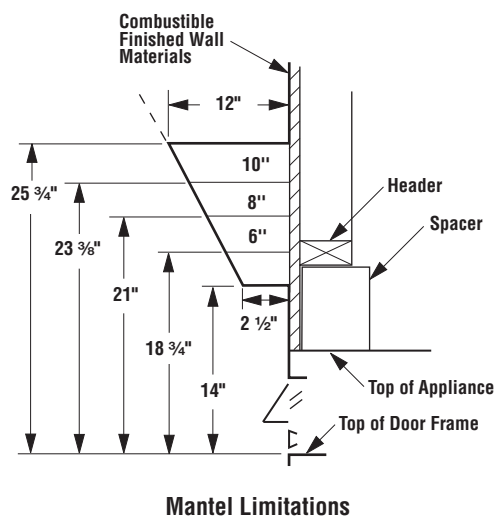


Minimum Clearance Combustibles

A hearth extension is not required with this appliance. If a hearth extension is used, it is merely for decorative purposes and does not have to meet standard hearth requirements. Do not block the lower louvered area.

A combustible mantel shelf projecting a maximum of 8" from the wall may be installed at minimum distance of 21" above the fireplace opening.

Note: Combustible wall finish materials and/or surround materials must not be allowed to encroach the area defined by the appliance front face (black sheet metal). Never allow combustible materials to be positioned in front of or overlapping the appliance front face.

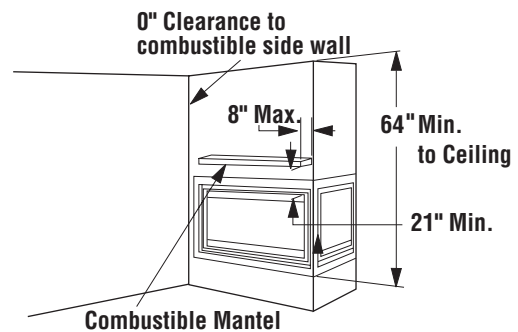

Minimum Clearance Framing